

ENGINEERING
TOMORROW

Danfoss

Data sheet

MicroChannel Heat Exchanger **For increased savings**


D1000-C MCHE Condenser

60%

Lower weight. Than
a copper fin-and-
tube coil for reduced
shipping costs and
easier handling

ra.danfoss.com

D1000-C Condenser coil MicroChannel Heat Exchanger

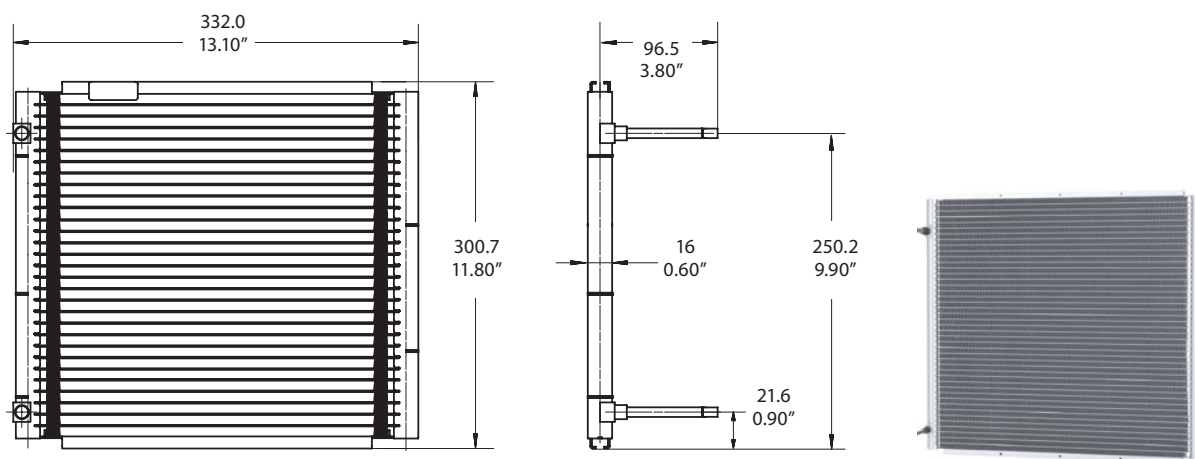

Introduction

This product is ideal for use in many different applications, such as residential AC, condensing units, air driers, cabinet cooling, and indoor displays. MCHEs have an ingeniously simple all-aluminum design that is not only lightweight but also prevents galvanic corrosion. The refrigerant-carrying tubes are formed to optimize heat transfer, enabling the production of more compact, but equally effective, cooling solutions. The smart louvered fin design maximizes surface contact, reducing the air-side pressure loss, improving efficiency, and reducing noise levels.

Key features

- Reduce refrigerant system charge
- Cost - Less sensitive to fluctuations in raw material prices
- Improve efficiency – More compact/better COP/increased capacity
- Better corrosion characteristics due to all-aluminum design

Technical data


Model	Coil length	Coil height	Core depth	Fin pitch	Inlet ID diameter	Outlet ID diameter	Min/Max. working temperature	Max. working pressure	Internal volume	Coil weight
D1000-C	330 (mm) 13.0 (in)	300 (mm) 11.8 (in)	16 (mm) 0.6 (in)	1.1 (mm) 23 (FPI)	6.15 (mm) 0.24 (in)	6.15 (mm) 0.24 (in)	-30 °C / 121 °C -22 °F / 250 °F	45 (bar) 650 (psi)	181 (cm³) 11.1 (in³)	0.8 (kg) 1.77 (lb)

Material

Tube: AA3102
Fins: FA6815 clad with AA4343
Manifold: AA3003 clad with AA4045
Inlet/Outlet tubes: Cu
Side plate: AA3003

Mounting

Aluminum MCHEs expand and contract when exposed to big temperature changes. Installation supports/brackets must allow the MCH to move in two dimensions.

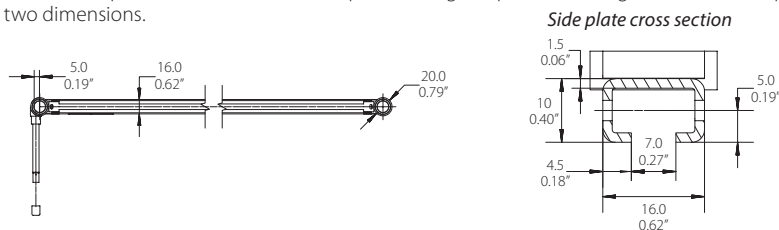

Standard connections

The product is equipped with standard copper pipe connections for easy mounting. Never bend or stress the inlet/outlet connections during mounting, and design installations to avoid vibration in operation.

Bending

MicroChannel Heat Exchangers can easily be bent to fit in any application. Ask your local Danfoss Sales representative for advice.

Availability

Our local stocking and distribution network allows standard MCHEs to be delivered globally with short delivery times. Contact your local Danfoss sales representative for the standard lead times in your region.

Third-party approvals

PED: N/A (Not needed for this product)
UL 207