

Level Measurement

Continuous level measurement - Ultrasonic transducers

EchoMax XRS-5

Overview



EchoMax XRS-5 ultrasonic transducer provides reliable, continuous level monitoring of liquids and slurries in narrow lift stations/wet wells, flumes, weirs and filter beds using a beam angle of just 10° and a CSM rubber face.

Benefits

- Narrow beam angle of only 10°
- Chemically resistant PVDF copolymer enclosure and CSM rubber face
- Measuring range: 8 m (26 ft) for measurement of liquids and slurries
- Fully submersible: IP68 degree of protection
- Easy installation with 1" NPT or R 1" BSPT connection

Application

The XRS-5 is non-contacting with a measuring range from 0.3 to 8 m (1 to 26 ft). Advanced echo processing ensures reliable data even in conditions with obstructions, turbulence, and foam.

The hermetically sealed CSM rubber face and the PVDF copolymer enclosure are designed for maximum resistance to methane, salt water, caustics, and harsh chemicals common to wastewater installations. With an IP68 degree of protection, this rugged sensor is fully submersible in the event of flood conditions. Use a submergence shield if full submergence is possible in the application. A submergence shield will maintain a high level reading output during submerged conditions.

The low-cost XRS-5 transducer is compatible with a full range of Siemens controllers, from a basic system for high/low alarm or simple pump control, up to advanced control systems with communications, telemetry and SCADA integration capabilities.

- Key Applications: wet wells, flumes, weirs, filter beds

Technical specifications

Mode of operation	
Measuring principle	Ultrasonic transducer
Input	
Measuring range	0.3 ... 8 m (1 ... 26 ft), dependent on application
Output	
Frequency	44 kHz
Beam angle	10°
Accuracy	
Temperature error	Compensated by integral temperature sensor
Rated operating conditions	
Vessel pressure	Normal atmospheric pressure
Ambient Conditions	
• Ambient temperature	-20 ... +65 °C (-4 ... +149 ° F)
Design	
Weight (approximate shipping weight of sensor with standard cable length)	1.2 kg (2.6 lb)
Material (enclosure)	PVDF copolymer enclosure and CSM face
Process connection	1" NPT [(Taper), ANSI/ASME B1.20.1] or R 1" [(BSPT), EN 10226]
Degree of protection	IP65/IP68
Cable connection	2-core shielded/twisted, 0.5 mm ² (20 AWG), PVC sheath
Cable (max. length)	<ul style="list-style-type: none"> • 365 m (1 200 ft) with RG 62 A/U coaxial cable • 365 m (1 200 ft) with 2-core twisted pair, foil shield, 0.5 mm² (20 AWG), PVC sheath, only for MultiRanger 100/200
Options	
Flange version	Factory flange with PTFE face for ASME, EN or JIS configuration
Submergence shield	For applications with flooding possible
Certificates and approvals	
CE, RCM, KCC	
CSA Class I, Div. 2, Groups A, B, C, D, Class II, Div. 1 Groups E, F, G	
FM Class I, Zone 1, AEx m IIC, T6 Class II, III, Div. 1, Groups E, F, G T6	
ATEX II 2GD / IECEx / INMETRO Ex mb IIC T6 Gb, Ex tb IIC T85 °C Db	

Selection and Ordering data	Article No.	Selection and Ordering data	Order code
EchoMax XRS-5 transducer With a beam angle of 10°, the XRS-5 provides reliable, continuous level monitoring of liquids and slurries in narrow lift stations/wet wells, flumes, weirs and filter beds. Measuring range: min. 0.3 m (1 ft), max. 8 m (26 ft) ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7ML1106- 	Further designs Please add "-Z" to Article No. and specify Order code(s). Acrylic coated, stainless steel tag [13 x 45 mm (0.5 x 1.75 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y17
Process connection 1" NPT [(Taper), ANSI/ASME B1.20.1] 1 R 1" [(BSPT), EN 10226] 2		Accessories Tag, stainless steel with hole, 12 x 45 mm (0.47 x 1.77 inch), one text line for fastening on sensors Submergence shield kit Easy Aimer 2, aluminum, NPT with 3/4" x 1" PVC coupling Easy Aimer 2, aluminum with M20 adapter and 1" and 1/2" BSPT aluminum couplings Easy Aimer 304, NPT with 1" stainless steel coupling Easy Aimer 304, with M20 adapter and 1" and 1/2" BSPT 304 stainless steel couplings FMS-200 universal box bracket, mounting kit FMS-210 channel bracket, wall mount FMS-220 extended channel bracket, wall mount FMS-310 channel bracket, floor mount FMS-320 extended channel bracket, floor mount FMS-350 bridge channel bracket, floor mount (see Mounting Brackets on page 4/179 for more information) 1" NPT locknut, plastic 1" BSPT locknut, plastic Plastic adapter 1" BSP - 20 mm Plastic adapter 1" NPT Plastic adapter 1" NPT/M20	Article No. 7ML1930-1BJ 7ML1830-1BH 7ML1830-1AQ 7ML1830-1AX 7ML1830-1AU 7ML1830-1GN 7ML1830-1BK 7ML1830-1BL 7ML1830-1BM 7ML1830-1BN 7ML1830-1BP 7ML1830-1BQ 7ML1830-1DS 7ML1830-1DR 7ML1830-1EA 7ML1930-1FX 7ML1830-1EF
Cable length 5 m (16.40 ft) A 10 m (32.81 ft) B 30 m (98.43 ft) C			
Facing Standard (CSM rubber) A PTFE (flange versions) B			
Approvals CE, RCM, KCC, CSA Class I, Div. 2, Groups A, B, C, D, Class II, Div. 1, Groups E, F, G FM Class I, Zone 1, AEx m IIC, T6 Class II, III, Div. 1, Groups E, F, G T6 ATEX II 2GD / IECEx / INMETRO Ex mb IIC T6 Gb, Ex tb IIIC T85 °C Db 2			
Mounting flange (flush mount) None A 3" ASME, 150 lb, flat faced B 4" ASME, 150 lb, flat faced C 6" ASME, 150 lb, flat faced D DN 80, PN 10/16, Type A, flat faced J DN 100, PN 10/16, Type A, flat faced K DN 150, PN 10/16, Type A, flat faced L JIS10K 3B style Q JIS10K 4B style R JIS10K 6B style S Note: flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1, or JIS B 2220 standard.			
Operating Instructions All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation		We can offer shorter delivery times for configurations designated with the Quick Ship Symbol . For details see page 10/11 in the appendix.	
We can offer shorter delivery times for configurations designated with the Quick Ship Symbol . For details see page 10/11 in the appendix.			

Level Measurement

Continuous level measurement - Ultrasonic transducers

EchoMax XRS-5

Selection and Ordering data

Article No.

EchoMax XRS-5C transducer

With a beam angle of 10°, the XRS-5 provides reliable, continuous level monitoring of liquids and slurries in narrow lift stations/wet wells, flumes, weirs and filter beds.

Measuring range: min. 0.3 m (1 ft), max. 8 m (26 ft)

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

7ML1105-

1 - 0

Process connection

1" NPT [(Taper), ANSI/ASME B1.20.1] ◆ 1

Cable length

5 m (16.40 ft) ◆ A

10 m (32.81 ft) ◆ B

30 m (98.43 ft) ◆ C

Facing

Standard (CSM rubber) ◆ A

PTFE (flange versions) ◆ B

Approvals

CSA Class I Div. 1, Groups A, B, C, D; Class II ◆ 1

Div. 1, Groups E, F, G; Class III

Mounting flange (flush mount)

None ◆

3" ASME, 150 lb, flat faced

4" ASME, 150 lb, flat faced

6" ASME, 150 lb, flat faced

Note: flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1, or JIS B 2220 standard.

Operating Instructions

All literature is available to download for free, in a range of languages, at <http://www.siemens.com/processinstrumentation/documentation>

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 10/11 in the appendix.

Selection and Ordering data

Order code

Further designs

Please add "-Z" to Article No. and specify Order code(s).

Acrylic coated, stainless steel tag [13 x 45 mm (0.5 x 1.75 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text ◆ Y17

Accessories

Submergence shield kit

Article No.

7ML1830-1BH

Easy Aimer 2, aluminum, NPT with ¾" x 1" PVC coupling

7ML1830-1AQ

Easy Aimer 304, NPT with 1" stainless steel coupling

7ML1830-1AU

FMS-200 universal box bracket, mounting kit

7ML1830-1BK

FMS-210 channel bracket, wall mount

7ML1830-1BL

FMS-220 extended channel bracket, wall mount

7ML1830-1BM

FMS-310 channel bracket, floor mount

7ML1830-1BN

FMS-320 extended channel bracket, floor mount


7ML1830-1BP

FMS-350 bridge channel bracket, floor mount (see Mounting Brackets on page 4/179 for more information)

7ML1830-1BQ


◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 10/11 in the appendix.

Dimensional drawings

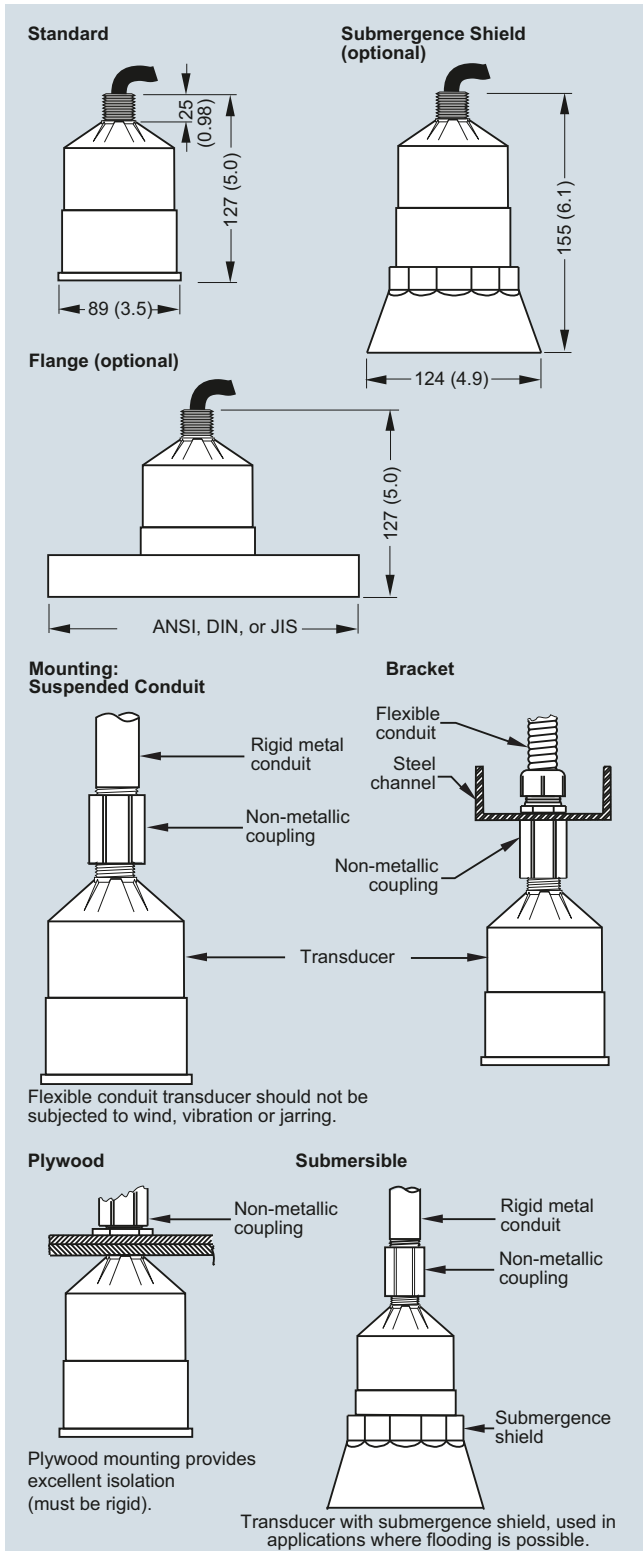

XRS-5 ultrasonic transducer, dimensions in mm (inch)

Schematics

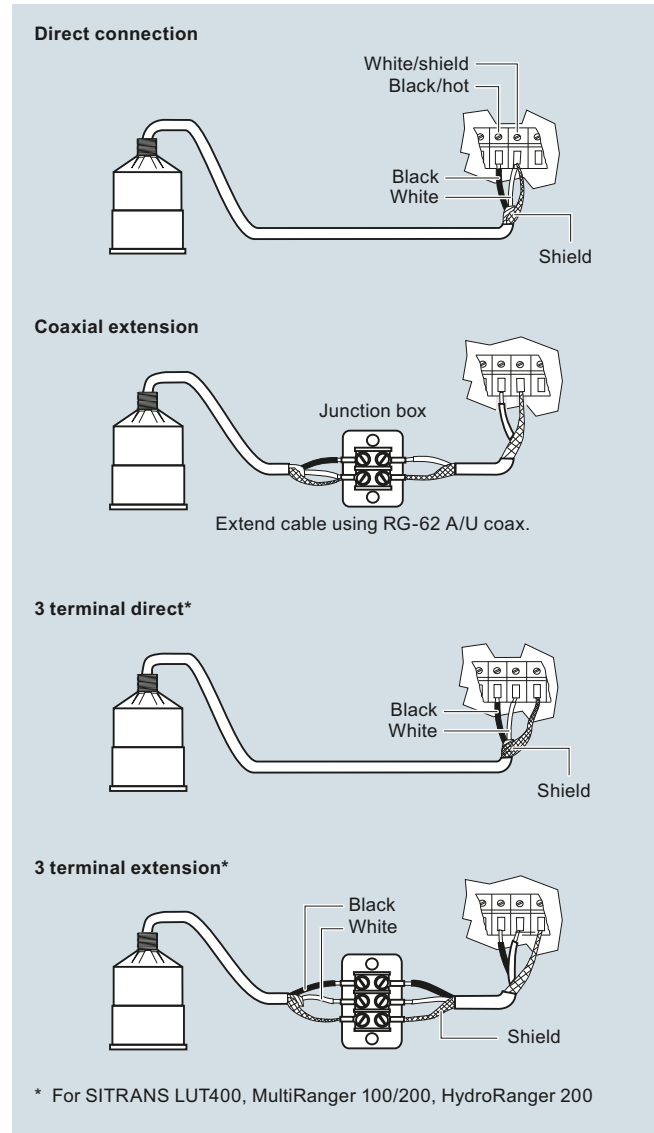

XRS-5 ultrasonic transducer connections