

Level Measurement

Continuous level measurement - Ultrasonic controllers

HydroRanger 200 HMI

Overview



HydroRanger 200 HMI is an ultrasonic level controller for up to six pumps and provides control, differential control, and open channel flow monitoring.

Benefits

- Easy to use HMI display with local four-button programming, menu-driven parameters, and Wizard support for key applications
- English, German, French, Spanish, Chinese, Italian, Portuguese, and Russian texts on the HMI
- Removable terminal blocks for ease of wiring
- Monitors wet wells, weirs, and flumes
- Communication using built-in Modbus RTU via RS 485 and SIMATIC PDM configuration software
- Compatible with SmartLinx system: PROFIBUS DP (cyclic access of process values only) and DeviceNET
- Single or dual point level monitoring
- 6 relays
- Auto False-Echo Suppression for fixed obstruction avoidance
- Anti-grease ring/tide mark buildup
- Differential amplifier transceiver for common mode noise rejection and improved signal-to-noise ratio
- Wall and panel mounting options

Application

For water authorities, municipal water, and wastewater plants, HydroRanger 200 HMI is an economical, low-maintenance solution delivering control efficiency and productivity needed to meet today's exacting standards. It offers single point monitoring with all models, and optional dual-point monitoring with 6 relay model. As well, it has digital communications with built-in Modbus RTU via RS 485.

The standard 6 relay HydroRanger 200 HMI will monitor open channel flow and features advanced relay alarming and pump control functions as well as volume conversion. It is compatible with SIMATIC PDM, allowing for PC configuration and set-up. Sonic Intelligence advanced echo-processing software provides increased reading reliability.

HydroRanger 200 HMI uses proven continuous ultrasonic echo ranging technology to monitor water and wastewater of any consistency up to 15 m (50 ft) in depth. Achievable resolution is 0.1 % with accuracy to 0.25 % of range. Unlike contacting devices, HydroRanger 200 HMI is immune to problems caused by suspended solids, harsh corrosives, grease or silt in the effluent, reducing downtime.

- Key Applications: wet wells, flumes/weirs, bar screen control

Technical specifications

Mode of Operation	
Measuring principle	Ultrasonic level measurement
Measuring range	0.3 ... 15 m (1 ... 50 ft), transducer dependent
Measuring points	1 or 2
Input	
Analog	0 ... 20 mA or 4 ... 20 mA, from alternate device, scalable (6 relay model)
Discrete	10 ... 50 V DC switching level Logical 0 ≤ 0.5 V DC Logical 1 = 10 ... 50 V DC max. 3 mA
Output	
EchoMax transducer	44 kHz
Ultrasonic transducer	Compatible transducers: ST-H and EchoMax series XPS-10, XPS-15/15F, and XRS-5
Relays ¹⁾	Rating 5 A at 250 V AC, non-inductive 4 SPST Form A/2 SPDT Form
mA output	0 ... 20 mA or 4 ... 20 mA
• Max. load	750 Ω, isolated
• Resolution	0.1 % of range
Accuracy	
Error in measurement	0.25 % of range or 6 mm (0.24 inch), whichever is greater
Resolution	0.1 % of measuring range or 2 mm (0.08 inch), whichever is greater ²⁾
Temperature compensation	• -50 ... +150 °C (-58 ... +302 °F) • Integral temperature sensor in transducer • External TS-3 temperature sensor (optional) • Programmable fixed temperature values
Rated operating conditions	
Installation conditions	Indoor / outdoor II 4
• Location	
• Installation category	
• Pollution degree	
Ambient conditions	
• Ambient temperature (enclosure)	-20 ... +50 °C (-4 ... +122 °F)
Design	
Weight	1.22 kg (2.68 lb)
• Wall mount	1.35 kg (2.97 lb)
• Panel mount	
Material (enclosure)	Polycarbonate
Degree of protection (enclosure)	IP65/Type 4X/NEMA 4X IP54/Type 3/NEMA 3
• Wall mount	
• Panel mount	
Cable	
• Transducer and mA output signal	2-core copper conductor, twisted, shielded, 300 Vrms, 0.82 mm ² (18 AWG), Belden 8 760 or equivalent is acceptable
• Max. separation between transducer and transceiver	365 m (1 200 ft)
Displays and controls	
	60 x 40 mm (2.36 x 1.57 inch) LCD 240 x 160 pixels resolution
Power supply³⁾	
AC version	100 ... 230 V AC ± 15 %, 50/60 Hz, 36 VA (17 W)
DC version	12 ... 30 V DC (20 W)

Level Measurement

Continuous level measurement - Ultrasonic controllers

HydroRanger 200 HMI


Certificates and approvals	<ul style="list-style-type: none"> CE, RCM, EAC, KCC⁴⁾ FM, CSA_{US/C}, UL listed CSA_{US/C} Class I, Div. 2, Groups A, B, C and D, Class II, Div. 2, Groups F and G, Class III (wall mount only) MCERTS Class 2 approved for Open Channel Flow 	Selection and Ordering data	Order code
Communication	<ul style="list-style-type: none"> RS 232 with Modbus RTU or ASCII via RJ-11 connector RS 485 with Modbus RTU or ASCII via terminal blocks Optional: SmartLinx cards for <ul style="list-style-type: none"> - PROFIBUS DPV1 (cyclic access of process values only) - DeviceNet 	<p>Further designs</p> <p>Please add "-Z" to Article No. and specify Order code(s).</p> <p>Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters), specify in plain text</p> <p>Test Certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and to ISO 9000</p>	Y15 C11
		<p>Operating Instructions</p> <p>English German</p> <p>Note: The Operating Instructions should be ordered as a separate item on the order.</p> <p>All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation</p>	Article No. A5E36281317 A5E36281391
Selection and Ordering data	Article No.	Other Operating Instructions	Order code
Siemens HydroRanger 200 HMI	7ML5034-	SmartLinx PROFIBUS DPV1, English SmartLinx PROFIBUS DPV1, German	A5E36197302 A5E36197305
Ultrasonic level controller for up to six pumps that provides control, differential control and open channel flow monitoring.		Note: The appropriate SmartLinx Operating Instructions should be ordered as a separate line on the order.	
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation	
Mounting, enclosure design		Accessories	
4 button HMI, Wall mount, standard enclosure	4	Tag, stainless steel, 12 x 45 mm (0.47 x 1.77 inch), one text line, suitable for enclosure	7ML1930-1AC
4 button HMI, Wall mount, 4 entries, 4 M20 cable glands included	5	Sunshield kit, 304 stainless steel	7ML1930-1GA
4 button HMI, Panel Mount	6	USB to RS 232 adapter	7ML1930-6AK
Input voltage		RS 232 to RJ11 COMMS adapter	7ML1830-1MC
100 ... 230 V AC	A	SITRANS RD100, loop powered display - see Chapter 7	7ML5741...
12 ... 30 V DC	B	SITRANS RD200, universal input display with Modbus conversion - see Chapter 7	7ML5740...
Number of measurement points		SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7	7ML5744...
Single point model, 6 relays	0	SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7	7ML5750...
Dual point model, 6 relays	2		
Communication (SmartLinx)		Spare parts	
Without module	3	Power Supply Board (100 ... 230 V AC)	7ML1830-1MD
SmartLinx PROFIBUS DP V0 module	4	Power Supply Board (12 ... 30 V DC)	7ML1830-1ME
SmartLinx DeviceNet module	1	Removable terminal blocks	A5E38824197
SmartLinx PROFIBUS DP V1 module	2	Spare lid with HMI, MultiRanger 200 HMI/ HydroRanger 200 HMI, wall	A5E35778738
See SmartLinx product page 4/337 for more information		Spare lid with HMI, MultiRanger 200 HMI/ HydroRanger 200 HMI, panel	A5E35778740
Approvals		SmartLinx PROFIBUS DP V1 module	A5E35778741
General Purpose CE, FM, CSA _{US/C} , UL listed, RCM, EAC, KCC			
CSA Class I, Div. 2, Groups A, B, C, and D; Class II, Div. 2, Groups F and G; Class III ¹⁾			
1) Available with Mounting/Enclosure design options 4 or 5			

Level Measurement

Continuous level measurement - Ultrasonic controllers


HydroRanger 200 HMI

Dimensional drawings

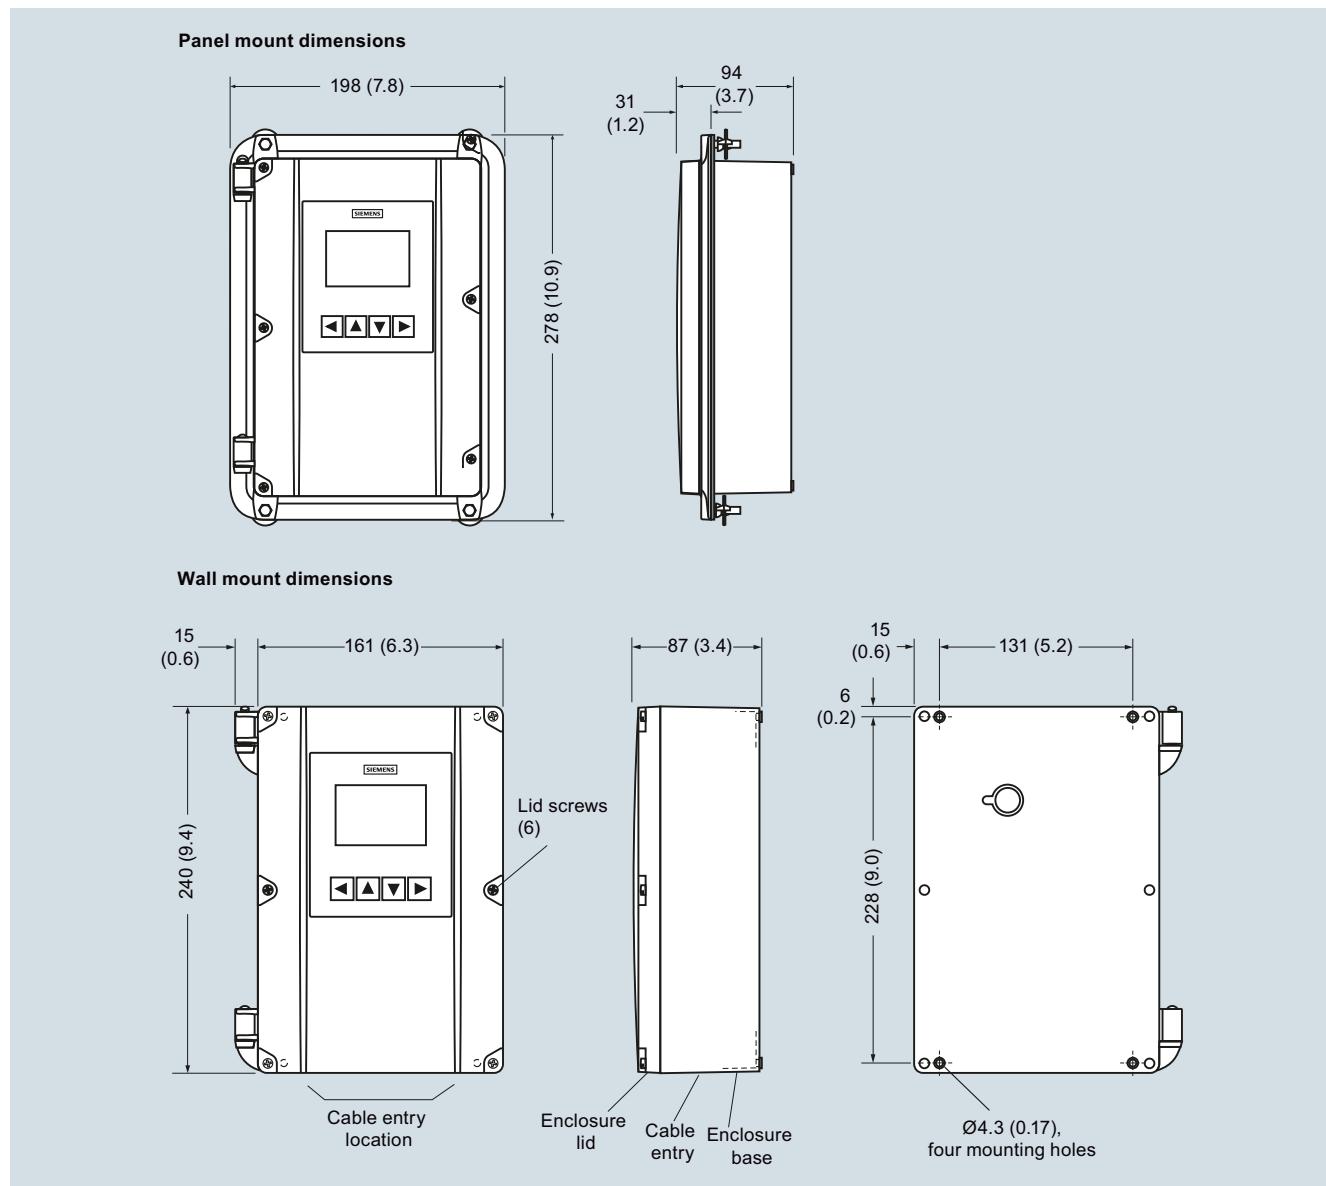

HydroRanger 200 HMI, dimensions in mm (inch)

Schematics

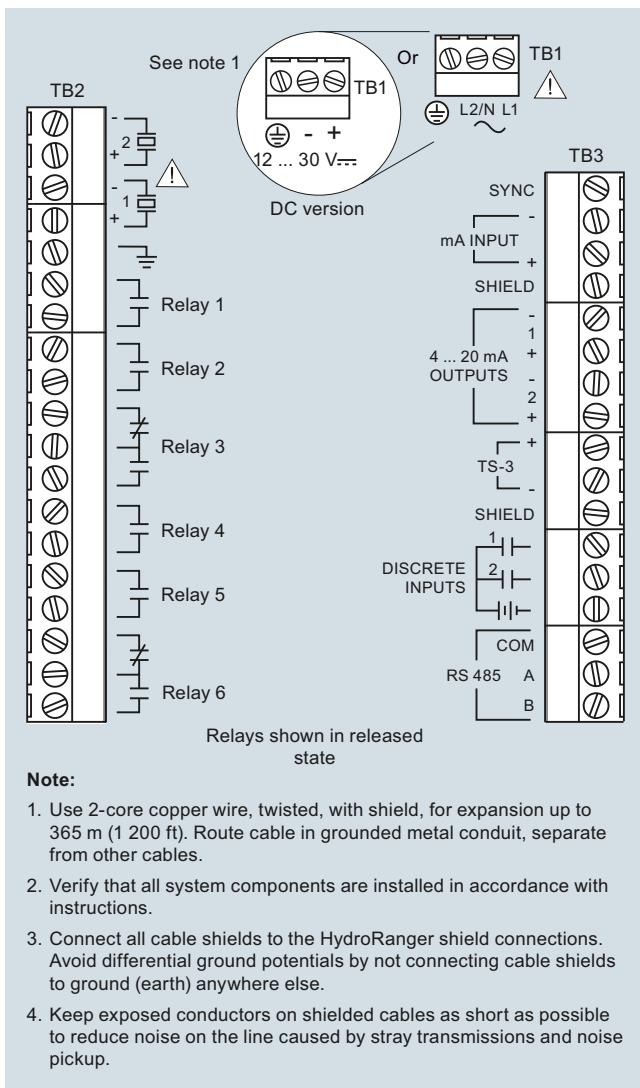

HydroRanger 200 HMI connections