

Overview



SITRANS Probe LU is a 2-wire loop powered ultrasonic transmitter for level, volume and flow monitoring of liquids in open channels, storage vessels, and simple process vessels.

Benefits

- Continuous level measurement up to 12 m (40 ft) range
- Easy installation and simple startup
- Programming using infrared Intrinsically Safe handheld programmer, SIMATIC PDM or HART Communicator
- Communication using HART or PROFIBUS PA
- ETFE or PVDF transducers for chemical compatibility
- Sonic Intelligence signal processing
- Auto False-Echo Suppression for fixed obstruction avoidance
- Level to volume or level to flow conversion

Application

The SITRANS Probe LU is ideal for level monitoring in the water and wastewater industry, chemical storage vessels, and small bulk hoppers.

The range of SITRANS Probe LU is 6 or 12 m (20 or 40 ft). Using Sonic Intelligence, Auto False Echo Suppression for fixed obstruction avoidance, and accuracy of 0.15 % of range or 6 mm (0.25 inch), the Probe LU provides unmatched reliability.


The Probe LU offers two communications options: HART or PROFIBUS PA (Profile version 3.0, Class B).

The transducer on the Probe LU is available as ETFE or PVDF to suit the chemical conditions of your application. As well, for applications with varying material and process temperatures, the Probe LU incorporates an internal temperature sensor to compensate for temperature changes.


- Key Applications: chemical storage vessels, filter beds, liquid storage vessels

Configuration

Parabolic mounting

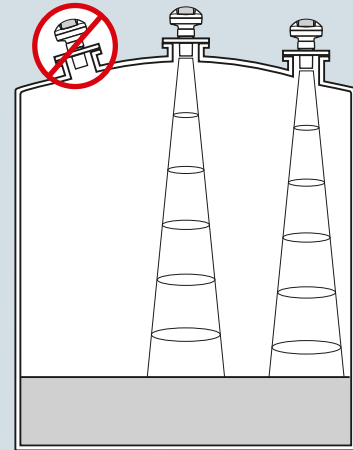

Flat mounting and beam angle

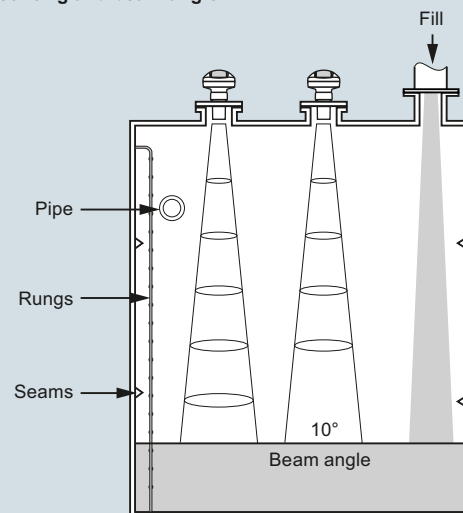

SITRANS Probe LU mounting


Level Measurement

Continuous level measurement - Ultrasonic transmitters

SITRANS Probe LU

Technical specifications

Mode of operation		Process connection	
Measuring principle	Ultrasonic level measurement	Threaded connection	2" NPT [(Taper), ANSI/ASME B1.20.1] R 2" [(BSPT), EN 10226] or G 2" [(BSPP), EN ISO 228-1]
Typical application	Level measurement in storage vessels and simple process vessels	Flange connection	3 inch (80 mm) universal flange
Inputs		Other connection	FMS 200 mounting bracket (see page 4/179) or customer supplied mount
Measuring range		Display and Controls	
• 6 m (20 ft) model	0.25 ... 6 m (10 inch ... 20 ft)	Interface	Local: LCD display with bar graph Remote: Available via HART or PROFIBUS PA
• 12 m (40 ft) model	0.25 ... 12 m (10 inch ... 40 ft)	Configuration	Using Siemens SIMATIC PDM (PC) or HART handheld communicator or Siemens infrared handheld programmer
Frequency	54 kHz	Memory	Non-volatile EEPROM
Outputs		Power supply	
mA/HART		4 ... 20 mA/HART	Nominal 24 V DC with 550 Ω maximum; maximum 30 V DC 4 ... 20 mA
• Range	4 ... 20 mA	PROFIBUS PA	12, 13, 15, or 20 mA depending on programming (General Purpose or Intrinsically Safe version) per IEC 61158-2
• Accuracy	± 0.02 mA	Certificates and Approvals	
PROFIBUS PA	Profile 3, Class B	General	CSA _{US/C} , FM, CE, RCM
Performance		Marine (only applies to HART communication option)	• Lloyd's Register of Shipping • ABS Type Approval
Resolution	≤ 3 mm (0.12 inch)	Hazardous	
Accuracy	± the greater of 0.15 % of range or 6 mm (0.24 inch)	• Intrinsically Safe (Europe)	ATEX II 1G Ex ia IIC T4 Ga
Repeatability	≤ 3 mm (0.12 inch)	• Intrinsically Safe (USA/Canada)	CSA/FM, Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4
Blanking distance	0.25 m (10 inch)	• Intrinsically Safe (International)	SIR 13.0008X Ex ia IIC T4 Ga
Update time	≤ 5 s	• Intrinsically Safe (Brazil)	INMETRO Ex ia IIC T4 Ga
• 4/20 mA/HART version	≤ 5 s at 4 mA	• Non-incendive (USA)	FM Class I, Div. 2, Groups A, B, C, D T4
• PROFIBUS version	≤ 4 s at 15 mA current loop	Handheld Programmer	
Temperature compensation	Built-in to compensate over temperature range	Intrinsically Safe Siemens handheld programmer	Infrared receiver
Beam angle	10°	• Approvals for handheld programmer	ATEX II 1GD / IECEx SIR 09.0073 Ex ia IIC T4 Ga Ex iaD 20 T135 °C FM/CSA Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G T6
Rated operating conditions		Ambient temperature	-20 ... 50 °C (-5 ... 122 °F)
Ambient conditions		Interface	Proprietary infrared pulse signal
• Location	Indoor/outdoor	Power	3 V lithium battery (non-replaceable)
• Ambient temperature	-40 ... +80 °C (-40 ... +176 °F)		
• Relative humidity/ingress protection	Suitable for outdoor		
• Installation category	I		
• Pollution degree	4		
Medium conditions			
• Temperature at flange or threads	-40 ... +85 °C (-40 ... +185 °F)		
• Pressure (vessel)	0.5 bar g (7.25 psi g)		
Design			
Material (enclosure)	PBT (Polybutylene Terephthalate)		
Degree of protection	Type 4X/NEMA 4X, Type 6/NEMA 6/IP67/IP68 enclosure		
Weight	2.1 kg (4.6 lb)		
Cable inlet	2 x M20 x 1.5 cable gland or 2 x ½" NPT thread or 1 x M20 x 1.5 and 1 x ½" NPT		
Material (transducer)	Buna-N seal with ETFE (Ethylene Tetrafluoroethylene) or PVDF (Polyvinylidene Fluoride)		

Selection and Ordering data	Article No.	Selection and Ordering data	Order code
SITRANS Probe LU 2-wire, loop powered ultrasonic transmitter for level, volume and flow monitoring of liquids in open channels, storage vessels, and simple process vessels. ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7ML5221- 	Further designs Please add "-Z" to Article No. and specify Order code(s). Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Y15 Measuring-point number/identification (max. 27 characters) specify in plain text	
Enclosure/Cable Inlet Plastic (PBT), 1 x M20 x 1.5 and 1 x ½" NPT (no cable glands supplied) 0 Plastic (PBT), 2 x M20 x 1.5 (includes 1 general purpose cable gland: 7ML1930-1AM) 1 Plastic (PBT), 2 x ½" NPT (no cable glands supplied) 2		Operating Instructions for HART/mA device English Note: The Operating Instructions should be ordered as a separate item on the order. All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation	Article No. A5E32337695
Range/Transducer material 6 m (20 ft), ETFE A 6 m (20 ft), PVDF Copolymer B 12 m (40 ft), ETFE C 12 m (40 ft), PVDF Copolymer D		Accessories Handheld programmer, Intrinsically Safe, EEx ia 7ML5830-2AH Handheld programmer, General Purpose approvals A5E36563512 Handheld programmer, Infrared, Intrinsically Safe, PROFIBUS PA 7ML5830-2AJ HART modem/USB (for use with a PC and SIMATIC PDM) 7MF4997-1DB 2" NPT locknut, plastic 7ML1830-1DT 2" BSPT locknut, plastic 7ML1830-1DQ 3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" NPT 7ML1830-1BT 3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" BSPT 7ML1830-1BU One General Purpose polymeric cable gland M20 x 1.5, rated for -20 ... +80 °C (-4 ... +176 °F) 7ML1930-1AM One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F) for General Purpose or ATEX EEx e installations (available for HART only) 7ML1930-1AP One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F) with integrated shield connection (available for PROFIBUS PA) 7ML1930-1AQ Universal box bracket, FMS-200 7ML1830-1BK Probe LU, rock guard/sunshield kit, 304 stainless steel 7ML1930-1GH	
Process connection 2" NPT [(Taper), ANSI/ASME B1.20.1] A R 2" [(BSPT), EN 10226] B G 2" [(BSPP), EN ISO 228-1] C		2" NPT locknut, plastic 7ML1830-1DT 2" BSPT locknut, plastic 7ML1830-1DQ 3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" NPT 7ML1830-1BT 3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" BSPT 7ML1830-1BU One General Purpose polymeric cable gland M20 x 1.5, rated for -20 ... +80 °C (-4 ... +176 °F) 7ML1930-1AM One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F) for General Purpose or ATEX EEx e installations (available for HART only) 7ML1930-1AP One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F) with integrated shield connection (available for PROFIBUS PA) 7ML1930-1AQ Universal box bracket, FMS-200 7ML1830-1BK Probe LU, rock guard/sunshield kit, 304 stainless steel 7ML1930-1GH	
Communication/Output 4 ... 20 mA, HART 1 PROFIBUS PA 2		2" NPT locknut, plastic 7ML1830-1DT 2" BSPT locknut, plastic 7ML1830-1DQ 3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" NPT 7ML1830-1BT 3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" BSPT 7ML1830-1BU One General Purpose polymeric cable gland M20 x 1.5, rated for -20 ... +80 °C (-4 ... +176 °F) 7ML1930-1AM One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F) for General Purpose or ATEX EEx e installations (available for HART only) 7ML1930-1AP One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F) with integrated shield connection (available for PROFIBUS PA) 7ML1930-1AQ Universal box bracket, FMS-200 7ML1830-1BK Probe LU, rock guard/sunshield kit, 304 stainless steel 7ML1930-1GH	
Approvals General Purpose, FM, CSA _{US/C} , CE, RCM, KCC 1 Non-incendive, FM Class I, Div. 2, Groups A, B, C, D T5 ¹⁾ 4 Intrinsically Safe, CSA/FM Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4 ²⁾ 5 Intrinsically Safe ATEX 1G / JECEX / INMETRO Ex ia IIC T4 Ga, RCM, KCC ²⁾ 6 Intrinsically Safe ATEX 1G / JECEX / INMETRO Ex ia IIC T4 Ga, RCM, KCC ³⁾ 7 Intrinsically safe, CSA/FM Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4 ³⁾ 8		2" NPT locknut, plastic 7ML1830-1DT 2" BSPT locknut, plastic 7ML1830-1DQ 3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" NPT 7ML1830-1BT 3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" BSPT 7ML1830-1BU One General Purpose polymeric cable gland M20 x 1.5, rated for -20 ... +80 °C (-4 ... +176 °F) 7ML1930-1AM One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F) for General Purpose or ATEX EEx e installations (available for HART only) 7ML1930-1AP One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F) with integrated shield connection (available for PROFIBUS PA) 7ML1930-1AQ Universal box bracket, FMS-200 7ML1830-1BK Probe LU, rock guard/sunshield kit, 304 stainless steel 7ML1930-1GH	
1) Available with Enclosure/Cable Inlet option 2 only. 2) Available with communication option 2 only. 3) Available with communication option 1 only. ● We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ●. For details see page 10/11 in the appendix.		SITRANS RD100, loop powered display - see Chapter 7 7ML5741-... SITRANS RD200, universal input display with Modbus conversion - see Chapter 7 7ML5740-... SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7 7ML5744-... SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7 7ML5750-... For applicable back up point level switch see point level measurement section.	
		Spare Parts Plastic lid 7ML1830-1KB ● We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ●. For details see page 10/11 in the appendix	


Level Measurement

Continuous level measurement - Ultrasonic transmitters

SITRANS Probe LU


Options

Flange adapter for mating 2" NPT or 2" BSP process connections to 3" ASME, DN 65 PN 10 and JIS 10K 3B flanges

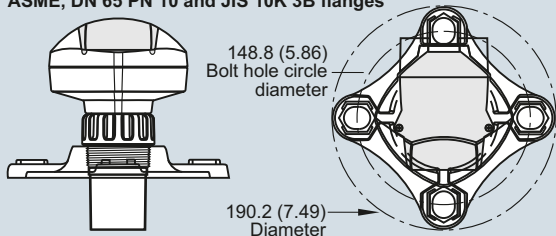

SITRANS Probe LU optional flange adapter, dimensions in mm (inch)


SITRANS Probe LU with FMS 200 universal box bracket

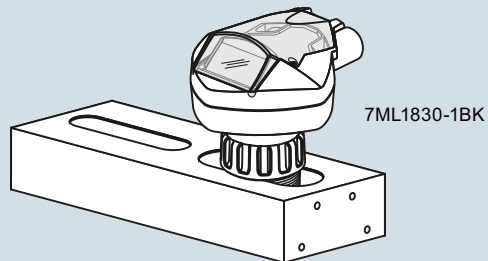

SITRANS Probe LU with optional mounting bracket

4


Dimensional drawings

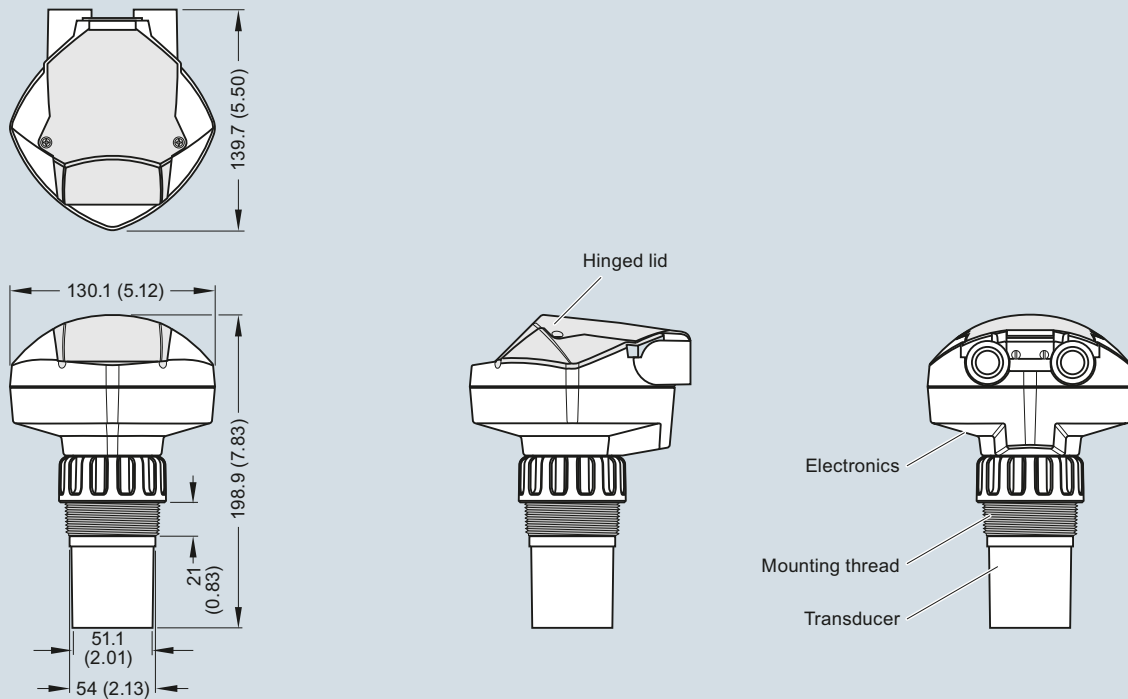

Note: Above model is shown without M20 cable glands or 1/2" NPT conduit connectors.

SITRANS Probe LU, dimensions in mm (inch)

Schematics

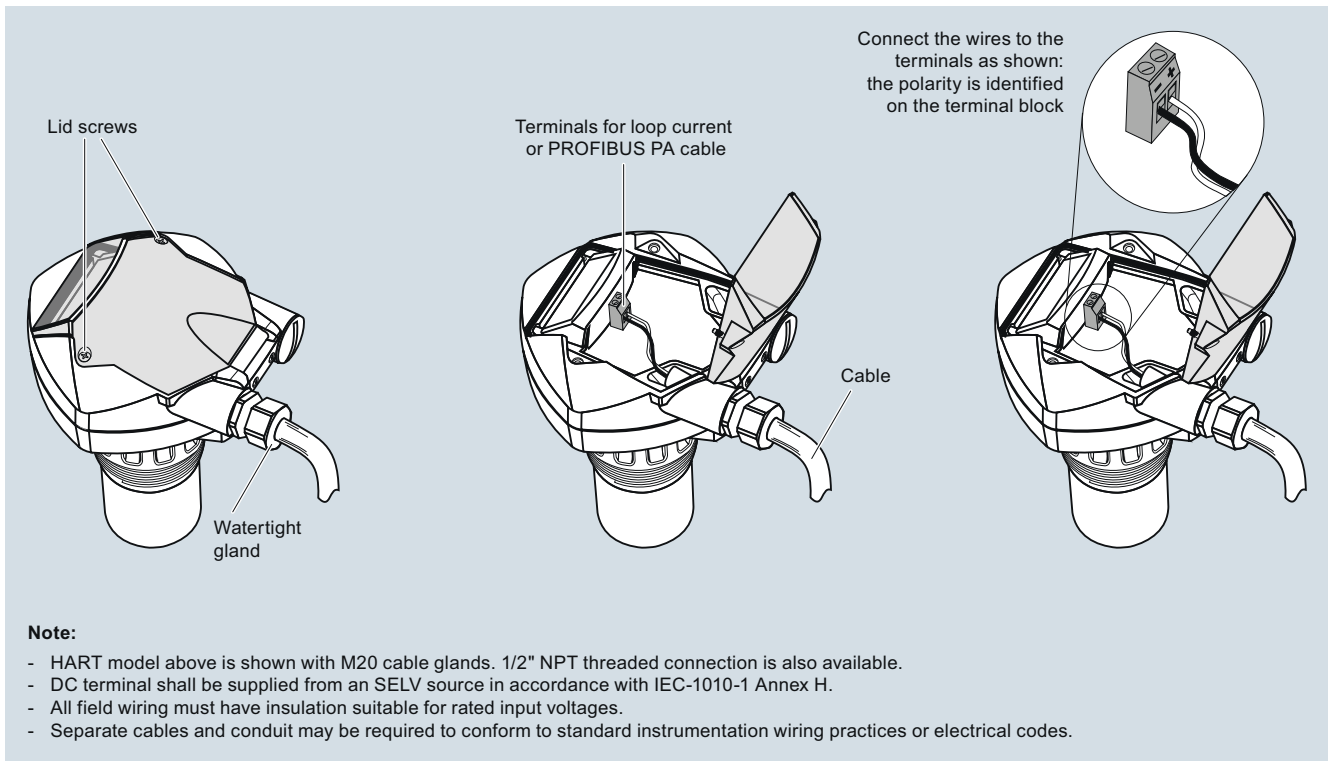

SITRANS Probe LU connections